

Facilitating access to computer simulation

Roman Rabenseifer

**KKPS Faculty of Civil Engineering, Slovak University of Technology
Radlinského 11, SK - 813 68 Bratislava, Slovakia,
roman.rabenseifer@stuba.sk**

RESUME. L'article traite des simulations informatiques du comportement futur des bâtiments en termes de besoins énergétiques et de confort intérieur. Il se concentre sur la question de la création d'applications permettant la réutilisation des modèles de simulation existants où il est nécessaire d'effectuer un grand nombre de calculs avec les variables sélectionnées, par exemple dans le cas de l'analyse de «sensibilité», l'optimisation et ainsi de suite. En utilisant un modèle de simulation simple, il décrit le principe de la création, les avantages et les inconvénients d'une telle approche, et également l'utilisation d'un modèle de simulation développé par et au-delà de l'application.

MOTS-CLÉS : simulation informatique, énergie, confort.

ABSTRACT. The article deals with computer simulations of the future behavior of buildings in terms of energy needs and indoor comfort. It focuses on the issue of creating applications enabling the reuse of existing simulation models where it is necessary to perform a large number of calculations with selected variables, e.g. in case of "sensitivity" analysis, optimization and so on. Using a simple simulation model it describes the principle of creation, advantages and disadvantages of such an approach, and also the usage of developed simulation model through and beyond the application.

KEYWORDS : computer simulation, energy, comfort.

1. INTRODUCTION

It is obvious that each building physical problem can be treated with several levels of accuracy, e.g. one-dimensional steady-state / transient simplified / detailed approach (manual or computer aided calculation) or two / three dimensional steady-state / transient simplified / detailed approach (manual or computer-aided calculation). Provided the building physical models are correct, the computer-aided simulation delivers far more precise results than simplified calculation methods. This can be advantageous not only in the advanced design phase, when searching for detailed solutions, but also during the initial design phase, when crucial constructional and technological decisions are made. Though the advantages are obvious, architects and very often other building professionals do not make use of them. The obstacles, which keep them from using computer simulation methods on a larger scale, usually are:

- The complexity of quality software, e.g. for dynamic computer simulations, which requires advanced computer skills and good knowledge of building physics.
- The amount of time needed to create building physically correct simulation models.

- Over-standardization in terms of too many different standards related to specific building physical problems.

The distance between architects and the software can be made shorter by developing generic models focused on a particular type of building, building component or technical equipment that we want to explore. From conventional models, the generic models differ in that it is possible to operate them from outside, e.g. change calculation parameters, run the simulation and process outputs through a simplified interface designed for the particular type of building, building component or technical device, without the user having to enter into the software, within which the generic models have been developed. Then non-experienced users would be able to perform accurate building performance simulations, as the generic models are based on existing, scientifically proven software. The notion “generic model” is neither fixed nor widely used term. Rather, it is a working description of simulation models designed to allow multiple routine calculations with varying parameters or components and controlled through a simplified tailored-made interface. Actually, the idea of facilitating building performance simulation by using pre-made models via simple user-friendly interface is relatively new. Therefore, there are not too many published sources dealing with this simulation approach. On the other hand, there are several solutions developed by some software and consulting firms (e.g. Physibel, TESS) facilitating non-users of their software the work with simulation models. For example, the software TRNSYS provides a tool called TRNSED that “allows users to develop customized graphical interfaces for specific applications and then distribute those applications to non-TRNSYS users. These “web-page like” TRNSED applications allow non-TRNSYS users to change system parameters, run simulations, and process output without having to learn the intricacies of the entire TRNSYS environment”. TESS developed several TRNSYS-based TRNSED applications that are available at its website. Unlike TESS, Physibel uses as interface Excel and for modeling always one of its software for thermal simulation. This paper describes Capsol-based generic model for assessing the future energy efficiency and indoor comfort of detached, low-energy houses. It treats the ground floor and the attic as two separate thermal zones, in order to take into account the difference in heat accumulation between more (ground floor) and less (attic) heavy construction of their envelopes. Capsol is Physibel’s program to calculate multi-zonal transient heat transfer. Both the generic model and the related Excel-based interface are available at the website www.cab.sk.

2. GENERIC MODEL

The principle of the application is based on the fact that Capsol input and output files are stored as text files and can be manipulated by external programmes, such as Visual Basic for Applications (VBA) available in Excel. Hence the Capsol model can be “overloaded” with modelled wall types, heating and cooling systems and climate data. Not all of them must necessarily be used in single calculation run. Such model can be named generic model. The selection of parameters or systems is then made via an external tailor-made building-type specific interface (Fig. 1), which is in this case programmed in Excel using VBA.

The user can either define (green fields, e.g. areas, orientations or roof slopes) or choose (yellow fields) some design parameters or pre-modelled operation of heating/cooling systems (Fig. 2):

- Building type, which can be either brick-based or lightweight construction. The building type is already defined by selection of the initial Capsol file, but can be changed at this point. The

possible change affects the thermal insulation thickness of the building walls as the brickwork wall composition is of a different thickness compared with the lightweight one.

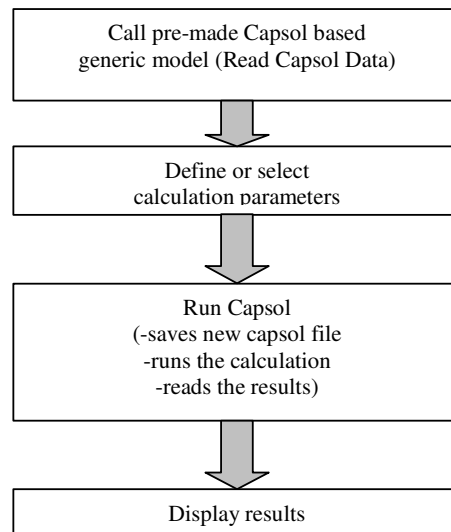


Figure 1 Simplified working scheme of the Excel VBA based interface

- Climate data (in principle calculations can be made for any climate data, provided they are organized in the form required). The version currently available contains climate data of three cities - Bratislava, Brussels and Stuttgart, which can be edited, should particular calculations be required.
- Thermal insulation thickness, where the selection can be made from among 100, 150, 200, 250 and 300 mm in case of brick-based, and 140, 190, 240, 280 and 330 mm in case of lightweight, construction. The thermal insulation is a part of the predefined wall compositions. The same applies to the roof construction, the thermal insulation of which is, in both cases, 220, 250, 275, 275 and 300 mm and automatically changes with the selection of the wall insulation thickness, so that if the wall insulation is 150 mm in the case of brickwork or 190 mm in the case of lightweight construction, the roof insulation is 250 mm.
- Quality of windows (glazing having the U-Value of 1.09 or 0.8 W/(m².K)).
- Heating system operation defined as air heating with or without heat exchanger. If the heat exchanger is applicable, the system is considered to be intermediate, having different target comfort temperatures for daytime and night. The heating system without heat exchanger can be either intermediate or without difference between the day and night target temperatures. Either way the required target temperatures (either a single value, if there is no difference between day and night, or values for daytime and night in case of intermediate heating) and the available heating power must be inserted. The expected necessary heating power can be assessed based on the steady-state calculation of the transmission and ventilation heat losses.
- Cooling system operations offering three options - an air conditioning, natural ventilation and an outer movable shading of windows. Each option can be used separately or in any combination with the other two.

1. Read CAPSOL initial data and enter a new data name	
Click the Read Capsol Data button to read initial data. If you are starting from scratch, select Fin_B.cap for brick-based or Fin_LT.cap for lightweight construction type!	
Capsol data file read:	Fin_B
Enter a new Capsol data file name:	Fin_B_temp
Read Capsol Data	
2. Select the building type	
Brick-based	
...	
12. Define the sun obstacles in the surroundings:	
Plane area	
13. Run CAPSOL	
Capsol run mode: wait at the end to see graphics? If yes, you have to save the graphics manually! Click the RunCapsol button	
no	
RunCapsol	
14. Main simulation results for following mean U-value:	
Yearly heating demand [kWh] - Ground floor	0.41
Yearly heating demand [kWh] - Attic	4112.67
Yearly heating demand [kWh] - Attic	2794.67
Yearly cooling demand [kWh] - Ground floor	0.00
Yearly cooling demand [kWh] - Attic	438.00
Nos. of hours with indoor T > 25°C [h] - Ground floor	0.00
Nos. of hours with indoor T > 25°C [h] - Attic	1835.30
Maximum indoor temperature [°C] - Ground floor	24.60
Maximum indoor temperature [°C] - Attic	27.60
15. Open the graphics in the pop-window:	
Show heating and cooling energy demand:	Energy demand
Show indoor comfort: (max. Ti, number of hours with Ti > 25°C):	Indoor comfort

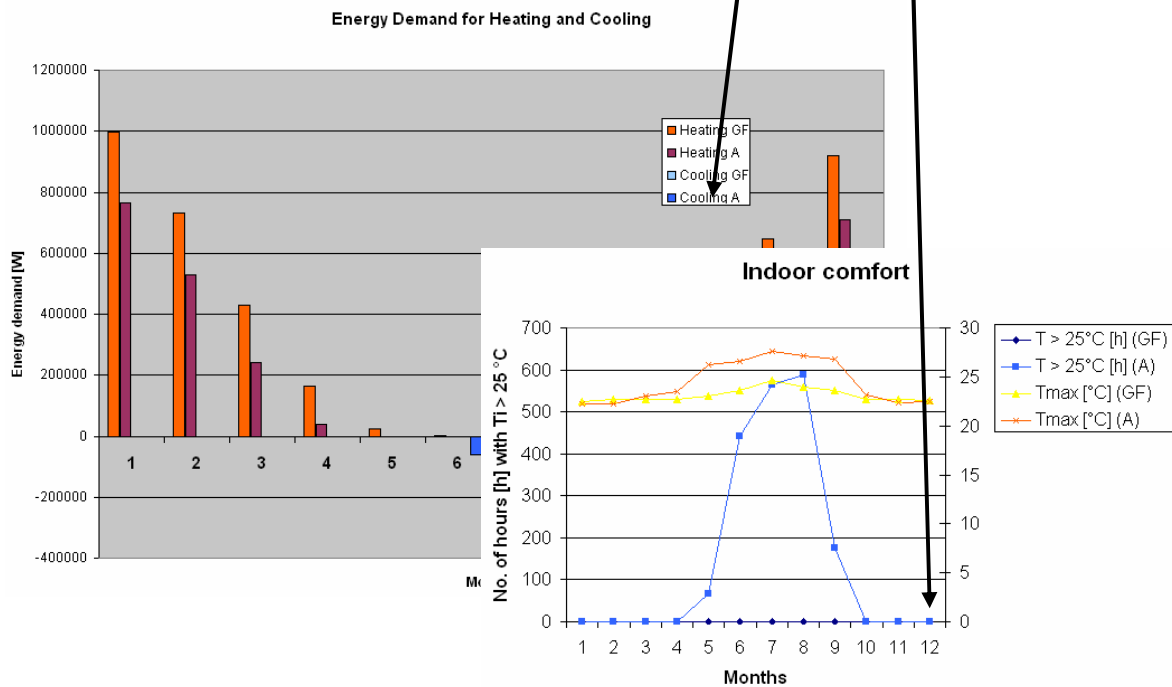


Figure 2 Excel VBA based interface of the generic model for assessment of the heating and cooling energy demand of detached houses - final table with selected result types and two buttons displaying either energy demand or thermal comfort chart (the abbreviation “GF” means Ground Floor and “A” stands for Attic)

The principle of the air conditioning is basically the same as the one behind intermediate heating. Natural ventilation, if applicable, means simply opening the windows, and is switched on and off at the inserted target comfort temperature (the natural ventilation should not be confused with the so called “hygienic” ventilation to outdoors, which is active the whole year round and set to 0.5 of total interior volume per hour whereas 30 per cent of the ground floor volume is ventilated via the attic (both floors are connected through the staircase)). The movable outer shading applies to all windows of the given facade, gable or roof and, if selected, is switched on and off at the solar radiation intensity of 200 W/m^2 .

- Sun obstacles in the surroundings defined as plane area, hilly country and forest / city, which correspond to maximum altitudes of 5° , 20° and 40° respectively of the foreseen obstacles.

After the definition and selection of the parameters / systems have been completed, the Capsol software is started using the button “Run Capsol” (Fig. 2). This command initiates the creation of a new Capsol file based on the generic model with user-defined and selected data, the actual calculation in Capsol and the import of required results back to Excel. As the purpose of this generic model is to investigate the heating and cooling energy demand and indoor thermal comfort, a special final table and two buttons displaying either energy demand or thermal comfort chart have been arranged. The basic generic model developed in Capsol can also be used separately from the Excel interface. Advanced Capsol users can use it as a base for creating their own modified models, as it contains prepared schemes of the heating and cooling operations. For such cases, the Excel interface is useless. While its purpose is to facilitate working with Capsol, it doesn't have to be used necessarily. The techniques used for modelling the single operations of heating and cooling systems are described in detail in the Capsol Manual and the Physibel Pilot Book (Standaert, 2004 & 2010).

3. CASE STUDY

The developed generic model can not be used for calculations directly related to the issuing of energy performance certificates. In fact they are based on many simplifications and steady-state processes and thus incompatible with the dynamic nature of the generic model. All the better is the use of the generic model for design improvements and optimization of the building, which have to be presented to customers in the energy certification accompanying consulting. The following charts (Figs. 3, 4 & 5) compare the indoor comfort and energy demand of two identical houses with the same mean U-value = $0.31 \text{ W/(m}^2\cdot\text{K)}$ and the same thermal resistances of the main parts of the envelope, but with different material composition of the facades (heavy one and lightweight one). Both house variants were situated in the forest / city, i.e. shaded location.

All calculations were performed using Brussels climate data. On the basis of the standardized calculations required by national legislation, such a comparison would not be possible. On the contrary, the Excel controlled generic model makes it very easy. The actual results are then indicating the impact of the material composition of the facade on interior comfort even if its thermal resistance is the same. Particularly the lightweight house will have problems with summer overheating even on shaded location.

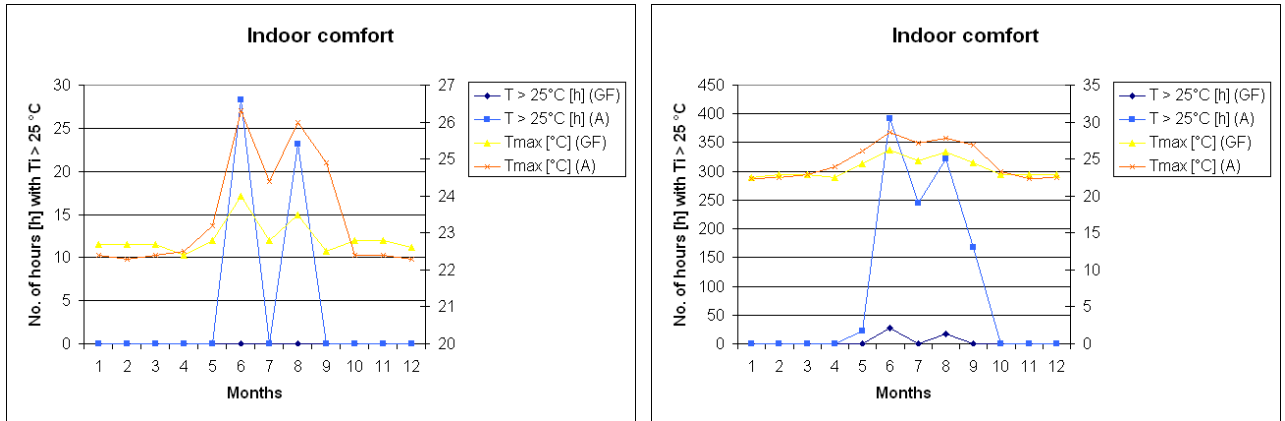


Figure 3 Indoor comfort charts for heavy brick-based (left) and lightweight (right) house having mean $U\text{-value} = 0.31 \text{ W}/(\text{m}^2 \cdot \text{K})$ and situated in the forest / city (shaded location) – secondary y-axis indicates monthly mean T_{max} (GF = Ground Floor, A = Attic)

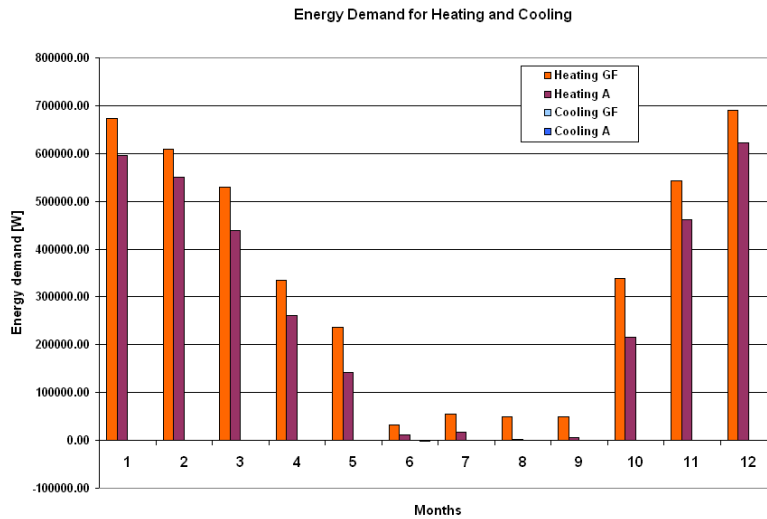


Figure 4 Energy demand chart for heavy brick-based house (GF = Ground Floor, A = Attic)

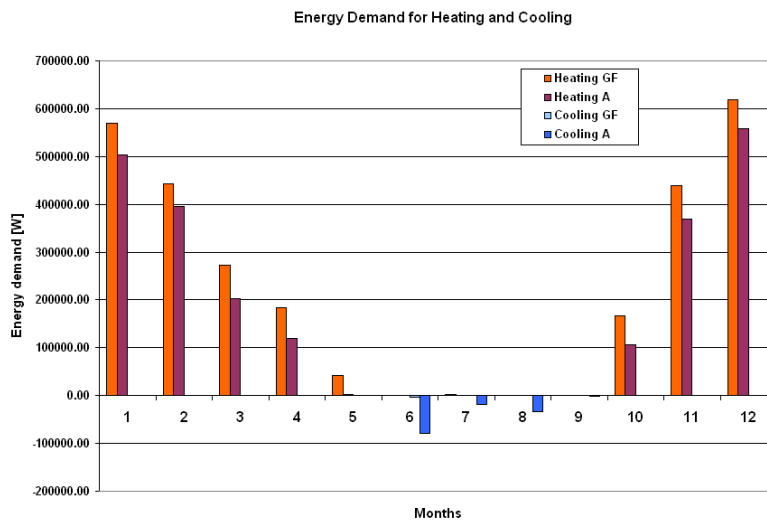


Figure 5 Energy demand chart for lightweight house (GF = Ground Floor, A = Attic)

4. DISCUSSION AND FUTURE WORK

In fact the generic models represent a way to overcome the obstacles, which keep architects and designers from using computer simulation methods. In general, by developing sets of ready-made simulation models (generic models) based on the existing accurate standardized calculation methods, an easy access to these calculation methods could be provided. The problem is that on the one hand, the existing standards provide sophisticated computational methods, but on the other hand, often overlap and are not mutually coherent. Hence, when dealing with one building physical problem, several standards have to be consulted (especially the ones related to the energy performance of buildings (Svoboda, 2009)). These standards either represent different levels of accuracy on their own or contain optional calculation methods at different levels of accuracy. From time to time they also differ in certain terms or symbols. To bring some clarity to the current situation, CEN seeks to examine or revise existing standards (Bendžalová, 2011). The objective is to create a new generation of standards, which should be much clearer, with a uniform methodology for Member States and in particular they should motivate their use and proper designing. Part of the standards should consist of transparent calculation methods in electronic form, programmed for example in MS Excel. Hence, the ready-made simulation models (generic models) could cover, for example, typical building physical problems occurring in today's design practice. Several simulation models could be developed at differing levels of accuracy for each building physical issue. Which simulation software is selected, would depend on the nature of the building physical problem. Less complex standardized calculation methods could be incorporated directly into Excel. Actually it should be started with such simple calculations before developing comprehensive whole building models for multiple use, e.g. for the purposes of energy certification of buildings. Even though quite simple (compared to other existing applications) the described generic model belongs to the sort of more complex models (in terms of the covered aspects), whereas the limits of its application are clearly visible:

- Simulated can be only buildings that can be meaningfully divided into two thermal zones, have no basement, only the ground floor and attic with pitched saddle roof,
- Thermal insulation of walls, roof, base plate, doors and windows can be selected, but not freely defined,
- Many aspects of heating and cooling systems are set, e.g. the efficiency of heat exchanger, "hygienic" ventilation path etc.

All of the above restrictions were intended to facilitate data transfers between the interface and the generic model. Of course more advanced users can directly modify the generic model, but that goes beyond its basic purpose, the aim of which is the use in its original form.

Hence, from the experience gained, it seems that the idea of a strong generic model with extensive user-friendly interface covering many aspects of the building operation is probably unrealistic in the near future. Unrealistic, because during the building operation many interrelated building physical processes are going on and, at the same time, the computational methods for describing these processes are, as already mentioned rather diversified. Promising way to implement this idea could be the development of generic models of individual partial processes. After their reliable testing they could be, perhaps, associated to higher units interconnected so that the individual generic sub-models are available within a single computational assessment of a whole building of a given type. Much

more, however, they could now contribute to the development of new standards in the intentions of CEN, facilitating the use of accurate computational methods, and overall systematisation of the available standardized computational procedures.

5. CONCLUSION

The advantage of generic models is the fact that the users can operate them from outside, e.g. change calculation parameters, run the simulation and process outputs through a simplified interface designed for the particular type of building, building component or technical device, without having to learn the underlying software, within which the generic models have been developed. Of course, the generic models can be used also without the use of simplified interface. Advanced users can change or adapt them for their specific purposes. The generic models can be developed for any building type or component and, depending on their purpose, in more or less detail. Their application can reach from the early design stage up to the detailed calculations of various components and systems used in a building. Large potential represents the new generation of EPBD based standards, which creates an environment for use of transient computer simulations. Moreover, the generic models can give users a high certainty that the achieved results are, building physically, correct. They can also contribute to the improvement of the users' thermal knowledge and experience. The principles of simulation techniques described in this paper can be, in slightly modified form, applied under other building performance simulation software as well.

6. ACKNOWLEDGEMENT

The preparation of this article was supported by the Hungarian TÁMOP-4.2.2.A-11/1/KONV-2012-0041 project. The project is co-financed by the European Union and the European Social Fund.

7. REFERENCES

- Bendžalová, Jana. 2011. Informácia o Styčnom výbore CAP-EDMC (Information on CAP-EDMC Liaison Committee), Správa pre zasadnutie TK 58 dňa 28.11.2011. In Zázpisnica z 25. zasadania TK 58 Tepelná ochrana budov zo dňa 28. 11. 2011, SÚTN, Bratislava, Slovakia (in Slovak)
- CAPSOL, v.4.0 Computer Program to Calculate Multi-zonal Transient Heat Transfer, © 2002 PHYSIBEL.
- Directive 2010/31/EU of the European Parliament and of the Council of 19 May 2010 on the energy performance of buildings (recast).
- Standaert, Piet. 2004. *PHYSIBEL Software Pilot Book - Practical problems solved using the Physibel Software*. PHYSIBEL, Belgium (unpublished)
- Standaert, Piet. 2010. *PHYSIBEL Software Pilot Book*. Version 2, September 2010 - upgrade 07.10.2010, PHYSIBEL, Belgium (unpublished)
- Svoboda, Zbyněk. 2009. Software pro výpočet energetické náročnosti budov (Software for Calculation of Energy Performance of Buildings). In *Sborník přednášek konference "Izolace 2009"*, Prague 2009, pp. 15-20 (In Czech)
- TRNSYS, Transient System Simulation Tool, USA (website at <http://www.trnsys.com/features/>)
- Walkenbach, John. 2007. *Excel 2007 Power Programming with VBA*. Wiley Publishing, Inc., Hoboken, NJ, USA